

PARTS LIST:

- (12) Mounting Screws
- (2) Roller Support Arms

INSTALLATION:

1. Determine the mid-line of the side of the spa you are installing the ROLLERS. Position each ROLLER halfway between the mid-line and the end of the spa (see X on Figure 1). The top edge of ROLLER should be flush with the top of the spa lip not the top edge of the cover (see Inset).
2. Attach each roller using (6) screws (Figure 2).

USE AND CARE:

To lock ROLLER in position, raise it until it is horizontal, then secure the bottom brace. Important: Do not attempt to raise the ROLLER beyond level (90 degrees) or damage to the ROLLER will occur (Figure 3).

Flip the cover open and push it onto the ROLLER Arms (Figure 4).

After Each Use: Push the cover back onto the spa and close. Release the brace and lower the ROLLERS into the resting position (Figure 5).

Note: A heavy spa cover is typically saturated with water. Water saturated foam has little insulating value and will damage the roller system. If your cover is heavy from water, it's time to replace.

- DO NOT sit on the open cover.
- DO NOT twist or move roller arms sideways.
- DO NOT mount roller arms on the front or equipment access side of the spa.
- DO NOT exceed weight on roller arms of 75 lbs.
- Remove snow or other weighted debris from cover before opening.

Manufactured for:

ESSENTIALS

Essentials is an industry leader in spa accessory and maintenance products. To view our complete product offering, visit us at www.Essentials-SpaSupplies.com.

All items can be ordered through your local retailer.

©2025 Essentials • Cumming, GA 30041

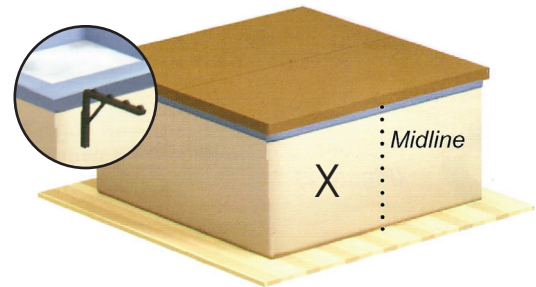


FIGURE 1

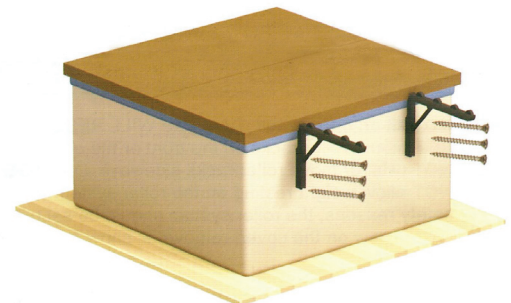


FIGURE 2

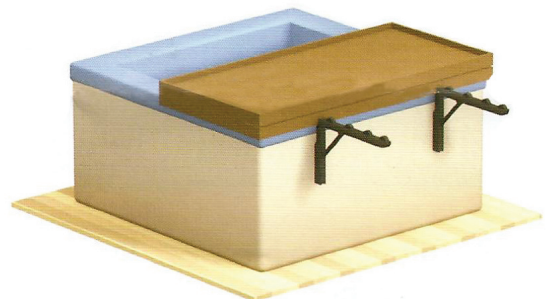


FIGURE 3



FIGURE 4

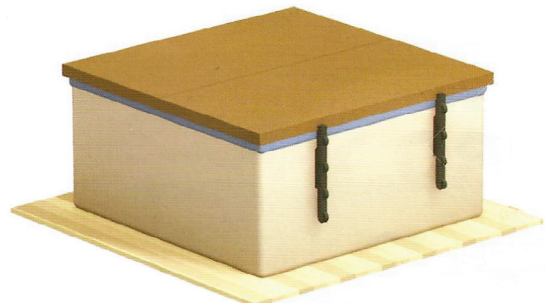


FIGURE 5