
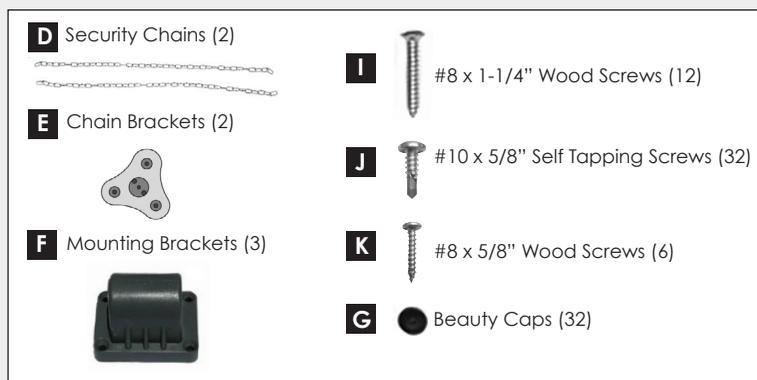


## PARTS LIST:

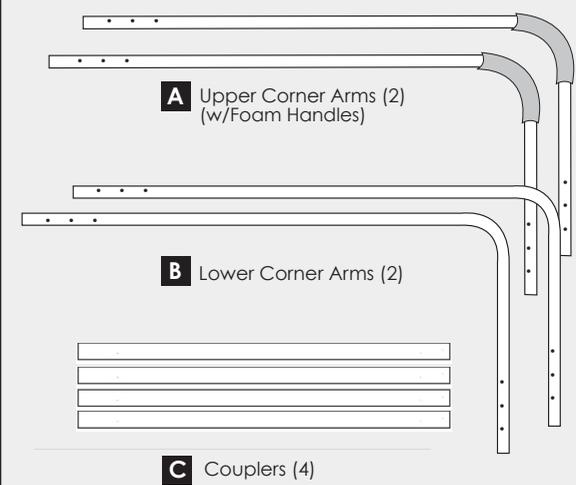

### BEFORE YOU START:

Put the SPA COVER properly in position on the spa in the closed position. The COVER LIFT will be mounted in the rear of the spa in the same direction as the cover hinge.

### STEP 1

Insert one COUPLER (C) into a MOUNTING BRACKET (F) and center. Insert the long end of the LOWER CORNER ARMS (B) into the outer two MOUNTING BRACKETS (F) and connect into the COUPLER (Figure 1).

**Do not attach any of the tubing together with screws yet.**

Space the MOUNTING BRACKETS (F) evenly across the width of the flat section of the spa cabinet. Do not install on the curve of the corners (Figure 2).

Using the #8 x 1-1/4" SCREWS (I), attach the three MOUNTING BRACKETS (F) to the back side of the spa.

It is recommended that you pre-drill the holes with a 1/16" drill bit.

### STEP 2

Next, insert another COUPLER (C) into the long side of the UPPER CORNER ARMS (A), then join the UPPER section to the lower section using the remaining two side COUPLERS (C). Figure 3. **Do not attach any of the tubing together with screws yet.**

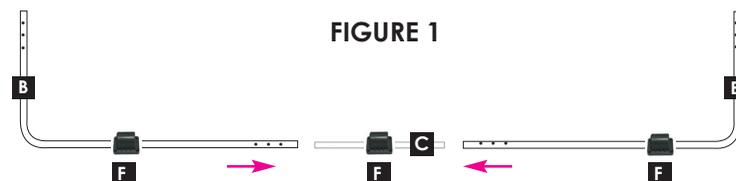


FIGURE 1

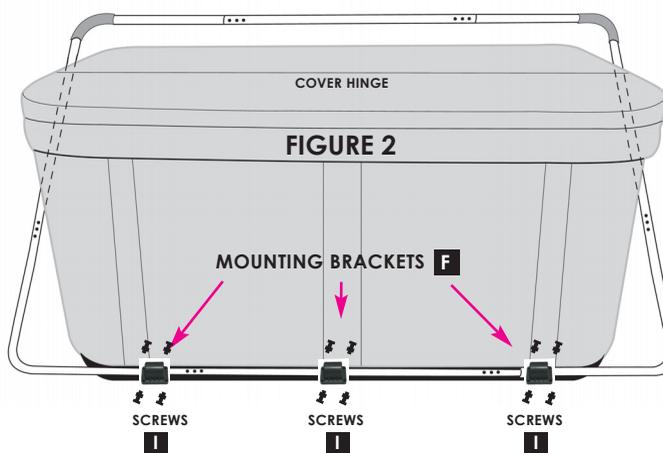


FIGURE 2

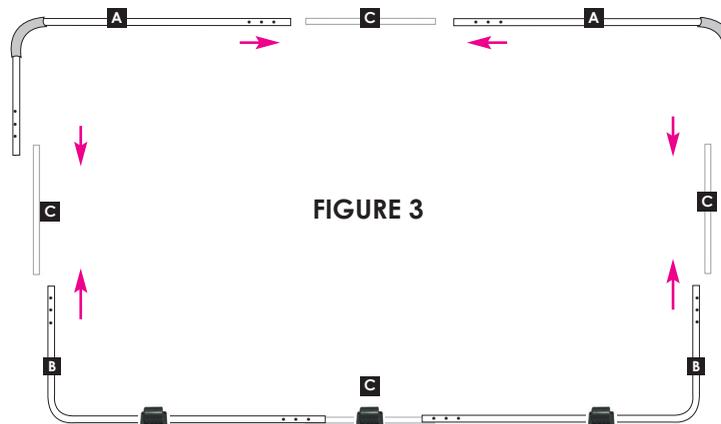


FIGURE 3

### STEP 3

With the upper section of the COVER LIFT laying on the spa cover, adjust and center the COUPLER and UPPER CORNER ARMS so that the Top Center Bar is lying parallel to the spa cover hinge about 1/2" behind the cover hinge (Figure 4). The width of the Cover Lift should extend 1-1/2" on each side.

Position the side COUPLERS in the center of the Upper and Lower Corner Arms and attach with the #10 self-tapping SCREWS (J). Insert one SCREW (J) into the tubing on each side of the end MOUNTING BRACKETS to prevent the Cover Lift from shifting.

### STEP 4

After fully inserting all SCREWS, move the Cover Lift to the upright and vertical position. Position the end of the Security Chain on the side ARM as shown in Figure 5. Attach using (1) #10 self-tapping screw (J). Using three #8 x 5/8" WOOD SCREWS (K), attach the CHAIN BRACKET (E) to the spa, then using a #10 SCREW (J), attach the end of the chain to the center of the Chain Bracket so that it is in a horizontal, level position. Note: Make sure the CHAIN position allows the COVER LIFT to open slightly MORE than vertical.

### STEP 5

Snap the black plastic BEAUTY CAPS (G) over all exposed screw heads. Attach the TOWEL HOLDER (H) on the preferred side of the COVER LIFT by simply snapping it into place and securing with a #10 self-tapping SCREW (J). Figure 6.

FIGURE 4

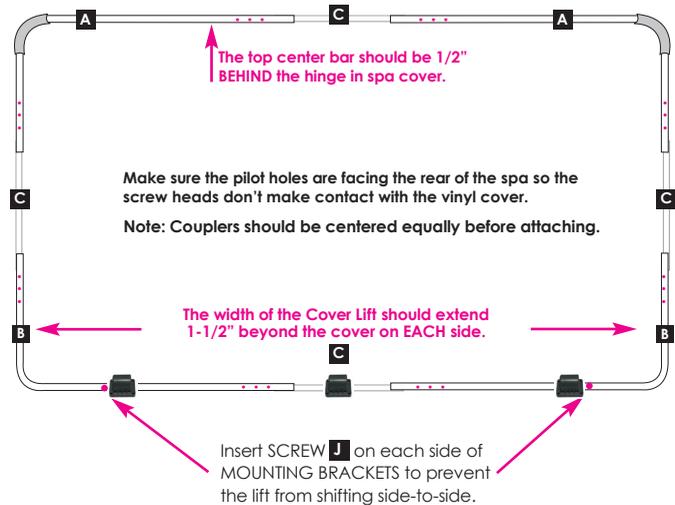


FIGURE 5


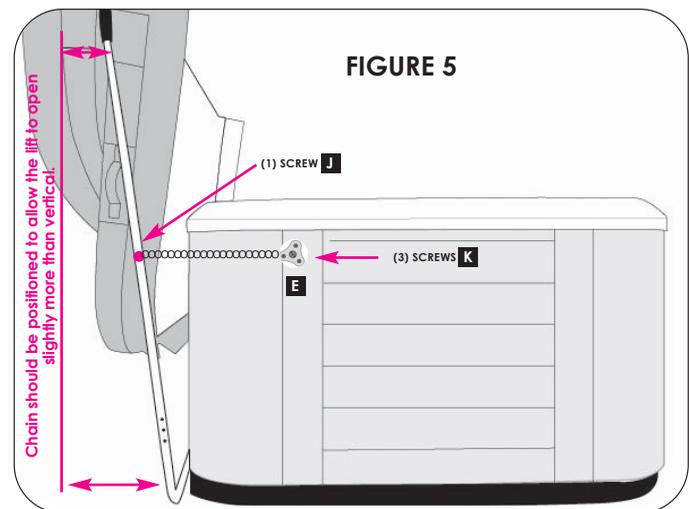


FIGURE 6

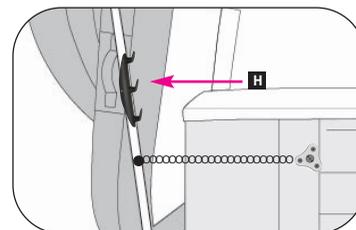

**TO OPEN:** Flip your spa cover back over the center support bar. Hold the top corner of the COVER LIFT by the foam handle and lift the bar towards the back of the spa until the spa cover is hanging in a slightly over-vertical position.

**TO CLOSE:** Holding the Foam Handle, pull down towards the middle of the spa. Once the spa cover is lying on the spa, flip the cover to close it completely over the spa.

DO NOT USE the Cover Lift in high wind conditions. Injury from the spa cover being blown closed could impact the spa user. DO NOT leave the Cover Lift open when not in use.

ESSENTIALS

©2025 Essentials - Cumming, GA 30041

Essentials is an industry leader in spa accessory and maintenance products.

To view our complete product offering, visit us at [Essentials-SpaSupplies.com](https://www.Essentials-SpaSupplies.com). All items can be ordered through your local retailer.